

NEW

CC-250 Series

3 Inch High Speed Thermal Printer



n The "Value" Printer:

The CC-250 is all about speed and price: Fast at 250mm/sec at a very affordable price.

n Versatility:

The CC-250 includes 2 interfaces to support our customers in their plans for new system's supporting speed and advanced connection of USB. Chose between either Serial/USB or Parallel/USB.

n Compatibility:

The CC-250 is ESC/POS™ based, making it compatible with 99% of all retail and hospitality applications. The CC-250 cash drawer connection is also ESC/POS printer compatible.

n Ease of Use:

CC-250 printer comes with everything in the box. Driver CD, power supply and all the interface cables for the printer.

n Reliability:


Despite its affordable cost, the CC-250 reflects high quality standard. 1 Millions cuts and 100km print head life, 60 Millions MCBF

n Easy Maintenance:

The CC-250 has been developed with quick maintenance in mind. Cutter, Print head and control board can be easily swapped in a matter of minutes.

CC-250UC Gray – Gray USB / Parallel

CC-250UD Gray – Gray USB / RS232



PRINT COMPRESSION



EASY LOAD



HIGH SPEED PROCESSING



10cm PAPER ROLL



250mm/sec

HIGH SPEED



ESC/POS™

ESC/POS™ ONLY



COMPACT



Exclusively Distributed by M-S Cash Drawer LLC

1-800-544-1749

www.mscashdrawer.com

www.echopos.com





Compact and easy loading of paper with no lever for increasing paper load reliability.


Fast and easy replacement of parts and cutter head.



The CC-250 can reduce the size of the receipt by 50%.



Included in the box: CC-250, CD and Power Supply (PS-60)

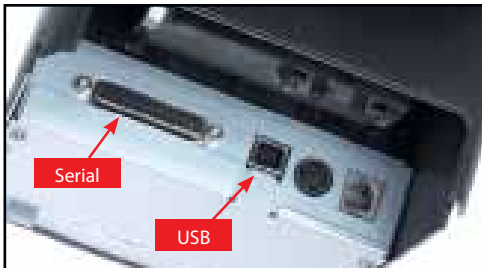

Dual interface:
Models USB / Serial or USB / Parallel



Compatibility with all major operating systems

CC-250 Specifications

| | |
|--------------------------|---|
| Print Method | Direct Thermal |
| Print Speed | Up to 250mm/sec. |
| Printer Resolution | 203 dpi |
| Number of Columns | Font A: 42/48 o 30/33 Font B: 56/64 o 40/45 |
| Character Set | 96 Characters |
| International Code Pages | 16 Sets |
| Barcodes | 9 Versions / PDF417 |
| Line Spacing | 1/6" or 1/8" + programmable |
| Paper Feed Speed | Up to 300mm / sec. |
| Paper Specifications: | |
| Width | 80mm standard / 58mm (with paper guide) |
| Thickness | 0.065 ~ 0.085mm / 63 ~ 85gsm |
| Roll Diameter | 102mm |
| Easy-Load | "Drop-In & Print" |
| Near End Sensor | Standard |
| Maximum Print Width | 80mm Paper = 72mm, 58mm paper = 50.8mm |
| Top Margin | 11mm Pre-determined |
| Autocutter (Guillotine) | Partial Cut (center cut) |
| Logo Store | 504KB with graphic management software |
| Flash ROM | 32Mbits |
| Drivers Available | Windows® XP SP3 Vista (32 bit / 64 bit) SP2 Windows® 7 (32 bit / 64 bit) SP1 OPOS driver |
| Interface Versions | Interface Serial/USB or Parallel/USB |
| Emulation | ESC/POS™ |
| Peripheral Drive Circuit | 2 circuits (24V Max. 1A), 1 Compulsion input |
| Operating Conditions: | |
| Temperature | 5°C a 45°C |
| Humidity | 10% ~ 90% HR (without condensation) |
| Storage Conditions: | |
| Temperature | -20 ~ 60°C |
| Humidity | 10% ~ 90% HR |
| Dimensions | 142 (An) x 212 (L) x 149 (Al) mm |
| Weight | 1.4 Kg (Autocutter/Tearbar) |
| Safety Standards | UL, FCC, EN55022, CE, Gost, CCC, CB Report |
| Reliability: | |
| Printer | 60 Million Lines (MCBF) |
| Autocutter | 1 Million Cuts |
| Options | Ticket Buzzer |

10cm diameter Paper Roll capacity

Unique 10cm outside diameter paper roll capacity with 60% more paper on a roll which means fewer paper roll changes; decreased cost per receipt; reduced paper roll transport and storage requirements.

No other manufacturer can offer all this!

STAR 10cm ROLL PAPER SAVING ADVANTAGES

| | | |
|--------------------------------|------------|------------|
| Paper Width | 80mm | 80mm |
| Outside Diameter | 79.5mm | 102mm |
| Core Size | 12.7mm | 12.7mm |
| Paper Thickness | 65 microns | 65 microns |
| Length of Paper on Single Roll | 74m | 119m |
| Increase over Standard Roll | 0% | 60% |

